


## Yoke Grade 8 Clevis Self Locking Hook BS EN 1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

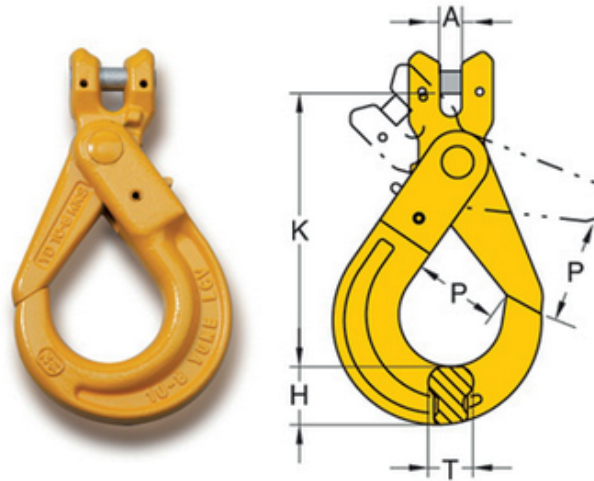

### METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg	CAD Files
8-026-07	7, 8	9	24	119	34	20	2.00	20	0.80	Format <input type="text"/>
8-026-10	10	11	30	143	44	26	3.15	15	1.40	Format <input type="text"/>
8-026-13	13	14	39	179	52	30	5.30	6	2.90	Format <input type="text"/>
8-026-16	16	18	49	212	60	36	8.00	4	5.60	Format <input type="text"/>
8-026-20	20	21	62	243	90	48	12.50	2	9.00	Format <input type="text"/>
8-026-22	22	24	63	273	80	49	15.00	2	13.00	Format <input type="text"/>

### IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-026-07	1/4 - 5/16	0.35	0.94	4.69	1.34	0.79	4500	20	1.80
8-026-10	3/8	0.43	1.19	5.63	1.77	1.02	7100	15	3.10
8-026-13	1/2	0.55	1.57	7.05	2.13	1.19	12000	6	6.40
8-026-16	5/8	0.71	1.93	8.35	2.44	1.42	18100	4	12.40
8-026-20	3/4	0.83	2.36	9.56	3.54	1.91	28300	2	19.40
8-026-22	7/8	0.95	2.48	10.70	3.14	2.12	34200	2	28.20