


Yoke Grade 8 Component Connector BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

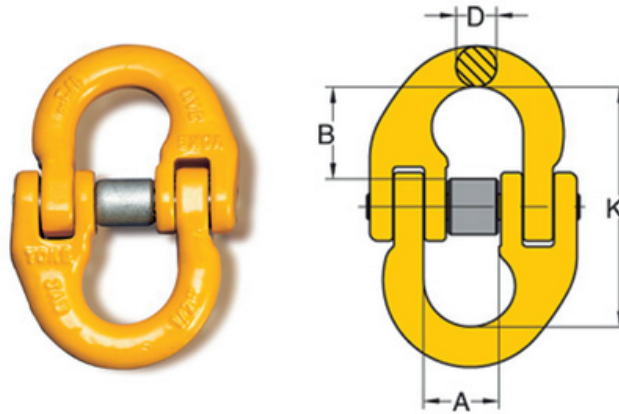

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	K mm	WLL tonnes	Box Quantity	Mass Kg	CAD Files
8-015-07	7, 8	18	22	9	57	2.00	150	0.20	Format
8-015-10	10	25	26	11	68	3.15	50	0.30	Format
8-015-13	13	30	35	16	91	5.30	35	0.70	Format
8-015-16	16	36	38	19	100	8.00	20	1.10	Format
8-015-20	18, 20	42	46	22	122	12.50	10	1.90	Format
8-015-22	22	49	59	24	152	15.00	6	3.00	Format
8-015-26	26	55	62	30	162	21.20	3	5.00	Format
8-015-32	32	69	79	36	202	31.50	2	9.00	Format

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	K inch	WLL lbs	Box Quantity	Mass lbs
8-015-07	1/4 - 5/16	0.71	0.89	0.35	2.25	4500	150	0.40
8-015-10	3/8	0.99	1.06	0.50	2.68	7100	50	0.70
8-015-13	1/2	1.19	1.38	0.62	3.58	12000	35	1.50
8-015-16	5/8	1.42	1.51	0.75	3.94	18100	20	2.40
8-015-20	3/4	1.65	1.81	0.87	4.80	28300	10	4.20
8-015-22	7/8	1.93	2.32	0.94	5.98	34200	6	6.60
8-015-26	1	2.17	2.44	1.19	6.38	47700	3	10.40
8-015-32	1-1/4	2.72	3.11	1.42	7.96	72300	2	19.40