


## Yoke Grade 8 Eye Self Locking Hook BS EN 1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

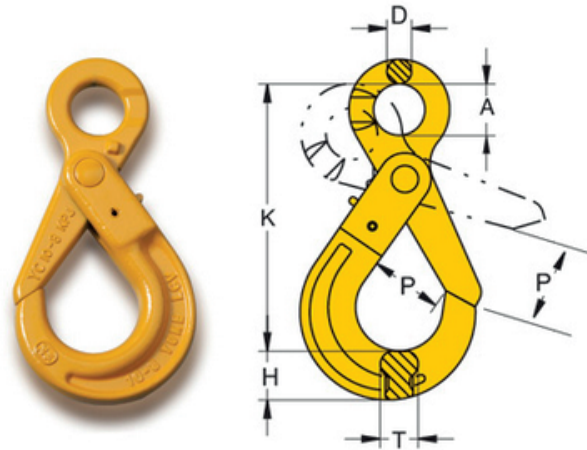

### METRIC SPECIFICATIONS

Part Code	Chain Size	A mm	D mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg	CAD Files
8-025-07	7, 8	25	11	24	136	34	20	2.00	20	0.80	<a href="#">Format</a>
8-025-10	10	32	13	30	167	44	26	3.15	12	1.40	<a href="#">Format</a>
8-025-13	13	40	16	39	207	52	30	5.30	6	3.00	<a href="#">Format</a>
8-025-16	16	52	21	49	252	60	36	8.00	4	5.80	<a href="#">Format</a>
8-025-20	20	64	23	62	282	90	48	12.50	2	8.50	<a href="#">Format</a>
8-025-22	22	70	24	63	319	80	49	15.00	2	12.50	<a href="#">Format</a>
8-025-26	26	80	25	69	343	99	56	21.20	1	14.00	<a href="#">Format</a>
8-025-28	28	90	28	81	401	120	63	25.00	1	26.00	<a href="#">Format</a>

### IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	D inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-025-07	1/4 - 5/16	0.98	0.44	0.94	5.35	1.34	0.79	4500	20	1.80
8-025-10	3/8	1.26	0.51	1.19	6.57	1.77	1.02	7100	12	3.10
8-025-13	1/2	1.56	0.62	1.57	8.15	2.13	1.19	12000	6	6.40
8-025-16	5/8	2.05	0.83	1.93	9.92	2.44	1.42	18100	4	12.60
8-025-20	3/4	2.52	0.91	2.36	11.10	3.54	1.91	28300	2	18.70
8-025-22	7/8	2.75	0.94	2.48	12.56	3.14	2.12	34200	2	27.60
8-025-26	1	3.15	0.98	2.72	13.50	3.90	2.20	47700	1	32.00
8-025-28	1-1/8	3.54	1.10	3.18	15.80	4.72	2.48	55100	1	54.90