


Yoke Grade 8 Eye Grab Hook BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

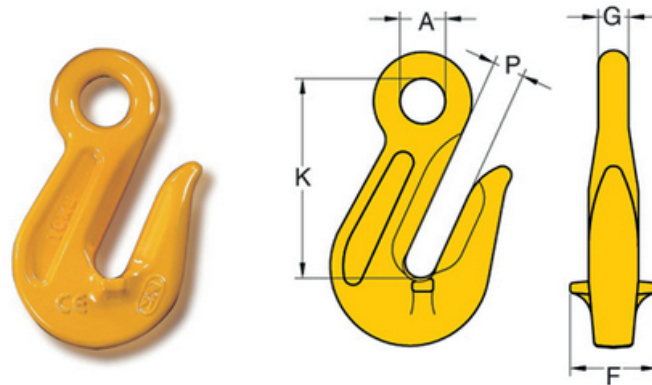

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	F mm	G mm	K mm	P mm	WLL tonnes	Box Quantity	Mass Kg	CAD Files
8-041-07	7/8	15	30	9	60	10	2.00	80	0.30	Format
8-041-10	10	20	41	13	84	13	3.15	40	0.60	Format
8-041-13	13	25	52	15	102	16	5.30	12	1.40	Format
8-041-16	16	30	57	20	114	20	8.00	10	2.30	Format
8-041-20	20	36	73	24	132	23	12.50	6	3.90	Format
8-041-22	22	38	70	26	165	26	15.00	5	4.70	Format
8-041-26	26	41	100	32	187	29	21.20	2	9.90	Format
8-041-32	32	61	127	40	230	37	31.50	1	21.40	Format

No reduction on working load limit thanks to supporting wings which prevent chain link deformation.

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	F inch	G inch	K inch	P inch	WLL lbs	Box Quantity	Mass lbs
8-041-07	1/4 - 5/16	0.59	1.18	0.35	2.36	0.39	4500	80	0.70
8-041-10	3/8	0.79	1.61	0.51	3.22	0.51	7100	40	1.30
8-041-13	1/2	0.98	2.05	0.59	4.02	0.63	12000	12	3.10
8-041-16	5/8	1.18	2.24	0.79	5.16	0.79	18100	10	4.90
8-041-20	3/4	1.49	2.87	0.91	5.75	0.91	28300	6	8.40
8-041-22	7/8	1.50	2.76	1.02	6.42	1.02	34200	5	10.10
8-041-26	1	1.81	3.94	1.26	8.07	1.14	47700	2	22.70
8-041-32	1-1/4	2.28	5.00	1.61	10.51	1.53	72300	1	44.10

No reduction on working load limit thanks to supporting wings which prevent chain link deformation.