


Yoke Grade 8 Swivel Sling Hook with Ball Bearing BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

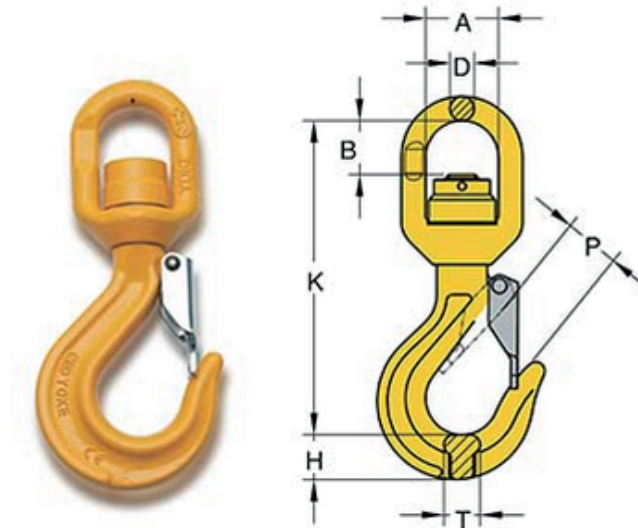

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg	CAD Files
8-049N-07	7, 8	36	27	12	22	155	26	18	2.00	20	0.90	Format
8-049N-10	10	41	37	16	29	189	36	23	3.15	8	1.60	Format
8-049N-13	13	46	40	21	35	233	42	28	5.30	6	3.40	Format
8-049N-16	16	60	50	22	44	280	50	35	8.00	4	5.10	Format
8-049N-20	20	74	82	25	65	356	56	49	12.50	2	9.50	Format

This hook is designed to fully swivel while in use lifting a load

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-049N-07	1/4 - 5/16	1.42	1.06	0.51	0.87	6.10	1.02	0.71	4500	20	2.00
8-049N-10	3/8	1.63	1.46	0.62	1.14	7.44	1.42	0.91	7100	8	3.50
8-049N-13	1/2	1.81	1.57	0.83	1.38	9.17	1.65	1.10	12000	6	7.50
8-049N-16	5/8	2.36	1.97	0.91	1.73	11.02	1.97	1.38	18100	4	11.70
8-049N-20	3/4	2.91	3.23	1.02	2.56	14.00	2.20	1.91	28300	2	20.50

This hook is designed to fully swivel while in use lifting a load